


KVM 72-Z44/Cr

Cable gland, brass chromed-plated, DIN 89280, M72



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

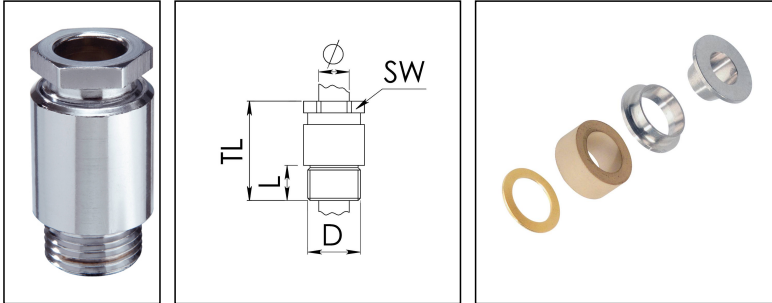

Material cable gland	Brass chromium-plated
Material sealing gasket	EPDM
Material earthing insert	Brass chromium-plated
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	M
Ø Connection thread D	72
Lead	2
Length screw-in thread L	16 mm
Ø cable diameter min	41 mm
Ø cable diameter max	44,5 mm
Key width SW	70 mm
Collar diameter (E)	75 mm
Total length TL	73 mm
Install. torques fitting	20 N m
Install. torques cap nut	15 N m
Advice	* Similar to DIN 89280
Surface	Chromium-plated
Order no. chrome-plated	10014544
Type	KVM 72-Z44/Cr
Packing unit	1
ETIM-Classification	EC000441

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

Recommended accessories

GM 72/Cr

10012075

15.08.2018

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 📠 +49-4191-508-209
contact@wiska.de · www.wiska.com