


## SKVS 13,5

Cable gland with bend protection, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

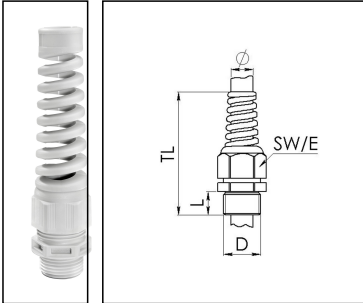

<b>Material cable gland</b>	Polyamide
<b>Material sealing gasket</b>	EPDM
<b>Protection class</b>	IP69, IP68 (5 bar 30 min)
<b>Temp. range min</b>	-20 °C
<b>Temp. range max</b>	80 °C
<b>Glow wire test</b>	750 °C
<b>Thread type</b>	PG
<b>Ø Connection thread D</b>	13,5
<b>Length screw-in thread L</b>	9 mm
<b>Ø cable diameter min</b>	6 mm
<b>Ø cable diameter max</b>	12 mm
<b>Key width SW</b>	24 mm
<b>Collar diameter (E)</b>	27 mm
<b>Total length TL</b>	105 mm
<b>Type of cable anchorage</b>	A
<b>Product Color</b>	RAL 7035
<b>Type</b>	SKVS 13,5
<b>Order no. RAL 7035</b>	10060618
<b>Packing unit</b>	25
<b>ETIM-Classification</b>	EC000441

Recommended accessories

MFD 25/02/060

10060452

MUG 13,5	10060673
<b>RDE 25</b>	10060768
<b>MFD 25/02/080</b>	10060952
<b>MFD 25/01/065</b>	10060954
<b>ADR 13,5</b>	10061422
<b>MFD 25/02/070</b>	10063995
<b>MFD 25/03/070</b>	10064342
<b>MFD 25/04/060</b>	10064343
<b>MFD 25/01/090</b>	10101016
<b>MFD 25/01/105-01/055</b>	10101255
<b>MFD 25/05/056</b>	10102023

23.07.2017

