


## SKVS 16

Cable gland with bend protection, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

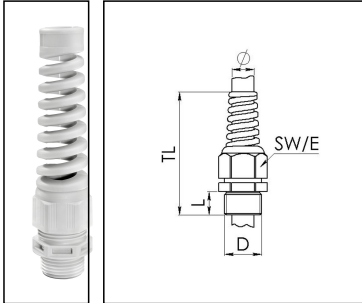

<b>Material cable gland</b>	Polyamide
<b>Material sealing gasket</b>	EPDM
<b>Protection class</b>	IP69, IP68 (5 bar 30 min)
<b>Temp. range min</b>	-20 °C
<b>Temp. range max</b>	80 °C
<b>Glow wire test</b>	750 °C
<b>Thread type</b>	PG
<b>Ø Connection thread D</b>	16
<b>Length screw-in thread L</b>	10 mm
<b>Ø cable diameter min</b>	10 mm
<b>Ø cable diameter max</b>	14 mm
<b>Key width SW</b>	27 mm
<b>Collar diameter (E)</b>	29 mm
<b>Total length TL</b>	119 mm
<b>Type of cable anchorage</b>	A
<b>Product Color</b>	RAL 7035
<b>Type</b>	SKVS 16
<b>Order no. RAL 7035</b>	10060619
<b>Packing unit</b>	25
<b>ETIM-Classification</b>	EC000441

Recommended accessories

**MUG 16**

**10060674**

<b>ADR 16</b>	10061423
<b>RDE 32</b>	10062186
<b>MFD 32/04/070</b>	10064344
<b>MFD 32/06/060</b>	10064345
<b>MFD 32/04/080</b>	10064950
<b>MFD 32/03/080</b>	10101018
<b>MFD 32/05/070</b>	10101140
<b>MFD 32/01/115-01/085</b>	10101256
<b>MFD 32/03/065</b>	10102169
<b>MFD 32/03/090</b>	10102170

25.06.2017

