


## EVPS-L 40

Pressure compensation unit long, polyamide, RAL 7035, M40



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

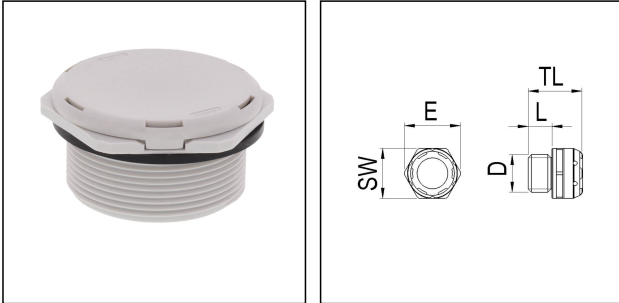

<b>Material cable gland</b>	Polyamide
<b>Material membrane</b>	ePTFE
<b>Material sealing gasket</b>	EPDM
<b>Airflow at 70mbar</b>	660 l/h
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	100 °C
<b>Glow wire test</b>	750 °C
<b>Protection class</b>	IP69, IP68
<b>Thread type</b>	M
<b>Ø Connection thread D</b>	40
<b>Lead</b>	1,5
<b>Length screw-in thread L</b>	18 mm
<b>Key width SW</b>	46 mm
<b>Collar diameter (E)</b>	51 mm
<b>Tightening torque</b>	10 N m
<b>Total length TL</b>	24,4 mm
<b>Product Color</b>	RAL 7035
<b>Order no. RAL 7035</b>	10106594
<b>Type</b>	EVPS-L 40
<b>Packing unit</b>	10
<b>ETIM-Classification</b>	EC000441

Recommended accessories

24.06.2018

