


## EVPS-L 40

Pressure compensation unit, polyamide



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

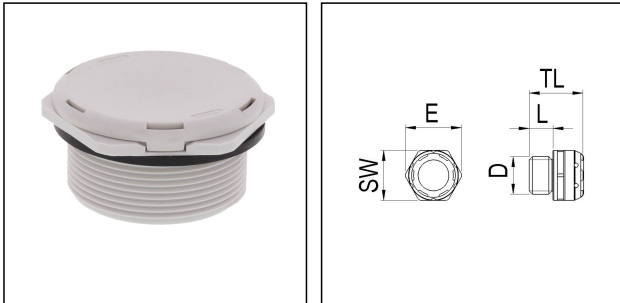

<b>Material cable gland</b>	Polyamide
<b>Material membrane</b>	ePTFE
<b>Material sealing gasket</b>	EPDM
<b>Airflow at 70mbar</b>	660 l/h
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	100 °C
<b>Glow wire test</b>	750 °C
<b>Protection class</b>	IP69, IP68
<b>Thread type</b>	M
<b>Ø Connection thread D</b>	40
<b>Lead</b>	1,5
<b>Length screw-in thread L</b>	18 mm
<b>Key width SW</b>	46 mm
<b>Collar diameter (E)</b>	51 mm
<b>Tightening torque</b>	10 N m
<b>Total length TL</b>	24,4 mm
<b>Product Color</b>	RAL 7035
<b>Order no. RAL 7035</b>	10106594
<b>Type</b>	EVPS-L 40
<b>Packing unit</b>	10
<b>ETIM-Classification</b>	EC000441

Remarks:

Vent PLUG pressure compensation unit  
Airflow at 70mbar

24.11.2017

