
BMCG-PVC-C-21-BK

Conduit, galvanized steel, PVC coated, corrugated





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	galvanized steel
Sheathing material 1st coating	PVC
Surface	corrugated
Product Color	RAL 9005
Protection class	IP67
Temp. range min	-15 °C
Temp. range max	80 °C
Operational areas	Mechanical plant engineering
NW	21
External diameter ED	24,7 mm
Ø inside	20,5 mm
Bending radius R	60 mm
Type	BMCG-PVC-C-21-BK
WISKA-Order no.	10109010
Packing unit	30 m
EAN number	4007686079166
Tariff number	83071000
ETIM-Classification	EC001179


Recommended accessories

EMBMFS-C-21-20	10109102
EMBMFS-C-21-25	10109104

06.11.2026

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

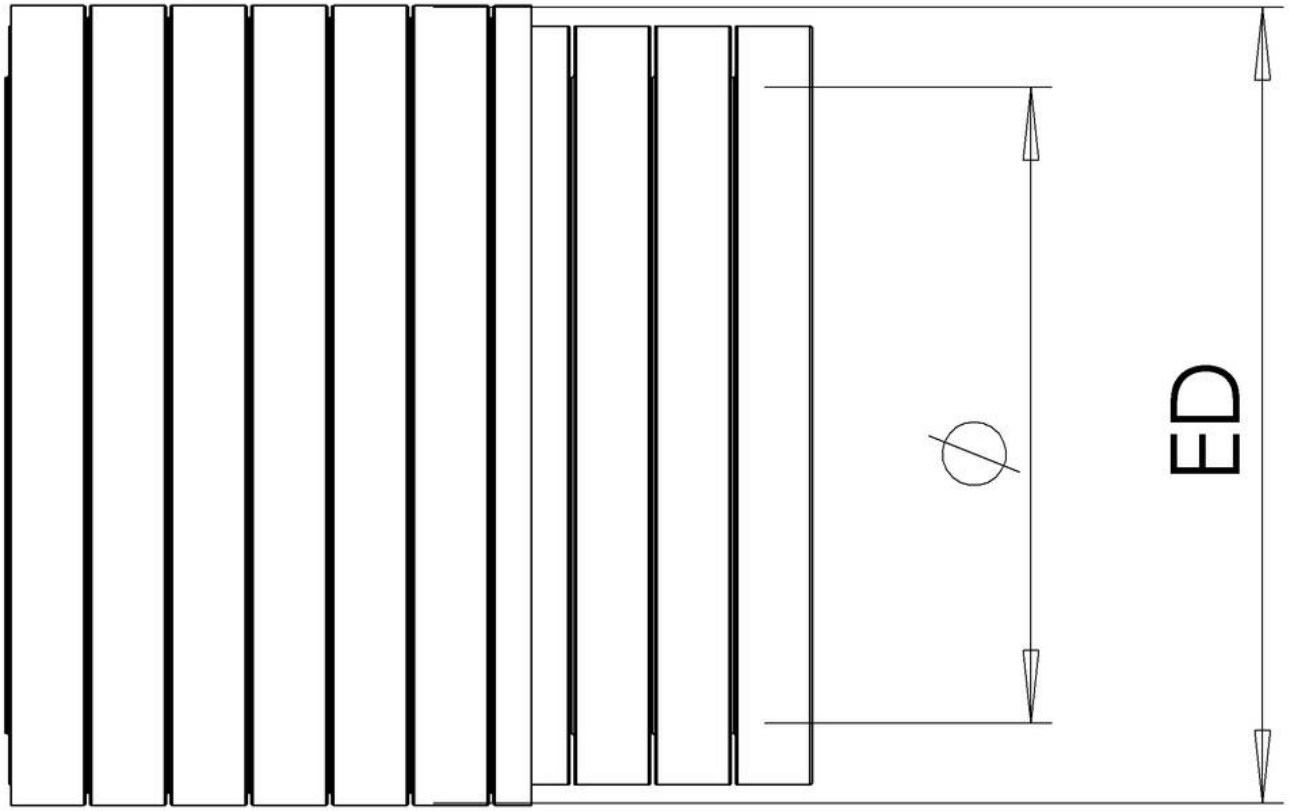

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice