
BMCG-PU-C-50-BL

Conduit, galvanized steel, PU coated, corrugated, blue, NW50



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	galvanized steel
Sheathing material 1st coating	PU
Surface	corrugated
Product Color	RAL 5015
Protection class	IP67
Temp. range min	-55 °C
Temp. range max	120 °C
Operational areas	EN 45545 - Railway
NW	50
External diameter ED	56 mm
Ø inside	50,5 mm
Bending radius R	200 mm
Type	BMCG-PU-C-50-BL
WISKA-Order no.	10109070
Packing unit	25 m
EAN number	4007686080292
Tariff number	83071000
ETIM-Classification	EC001179


Recommended accessories

EMBMFS-C-50-50	10109118
EMBMFS-C-50-63	10109120

06.11.2026

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

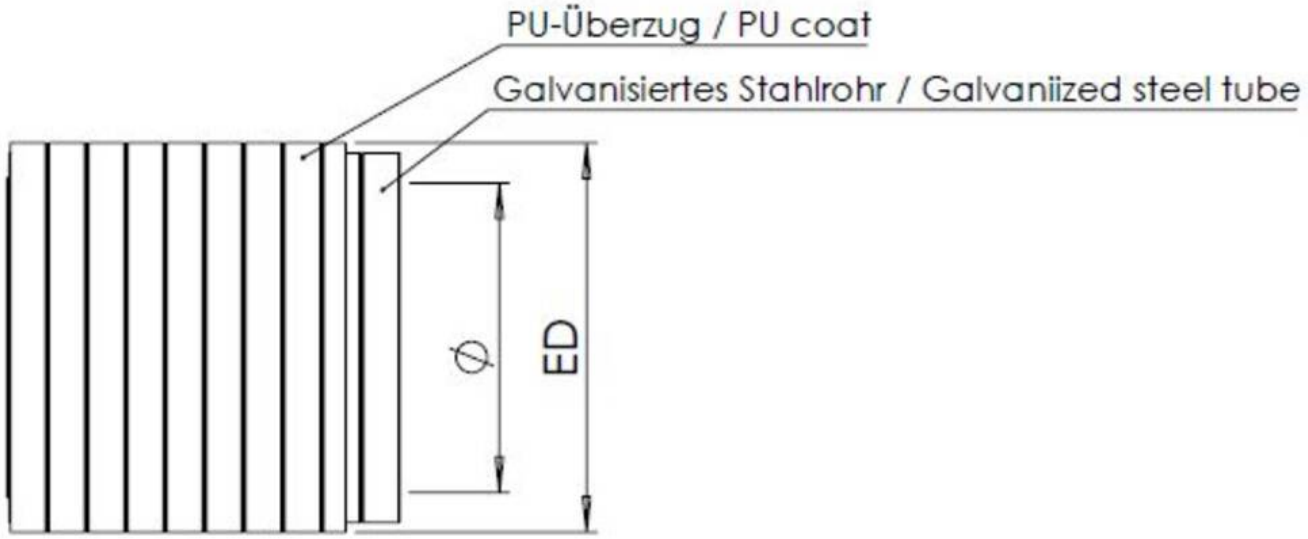

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice