
BMCG-PVC-C-BG-40

Conduit, galvanized steel core PVC coated and steel wire over-braid, NW40







Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	galvanized steel
Sheathing material 1st coating	PVC
Sheathing material 2st coating	Steel wire, galvanized
Surface	corrugated
Protection class	IP67
Temp. range min	-15 °C
Temp. range max	70 °C
Operational areas	Mechanical plant engineering
NW	40
External diameter ED	47,5 mm
Ø inside	39,5 mm
Bending radius R	160 mm
Type	BMCG-PVC-C-BG-40
WISKA-Order no.	10109085
Packing unit	25 m
EAN number	4007686080599
Tariff number	83071000
ETIM-Classification	EC001179


Recommended accessories

EMBMFS-S-40-40	10109113
EMBMFS-S-40-50	10109115

06.11.2026

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

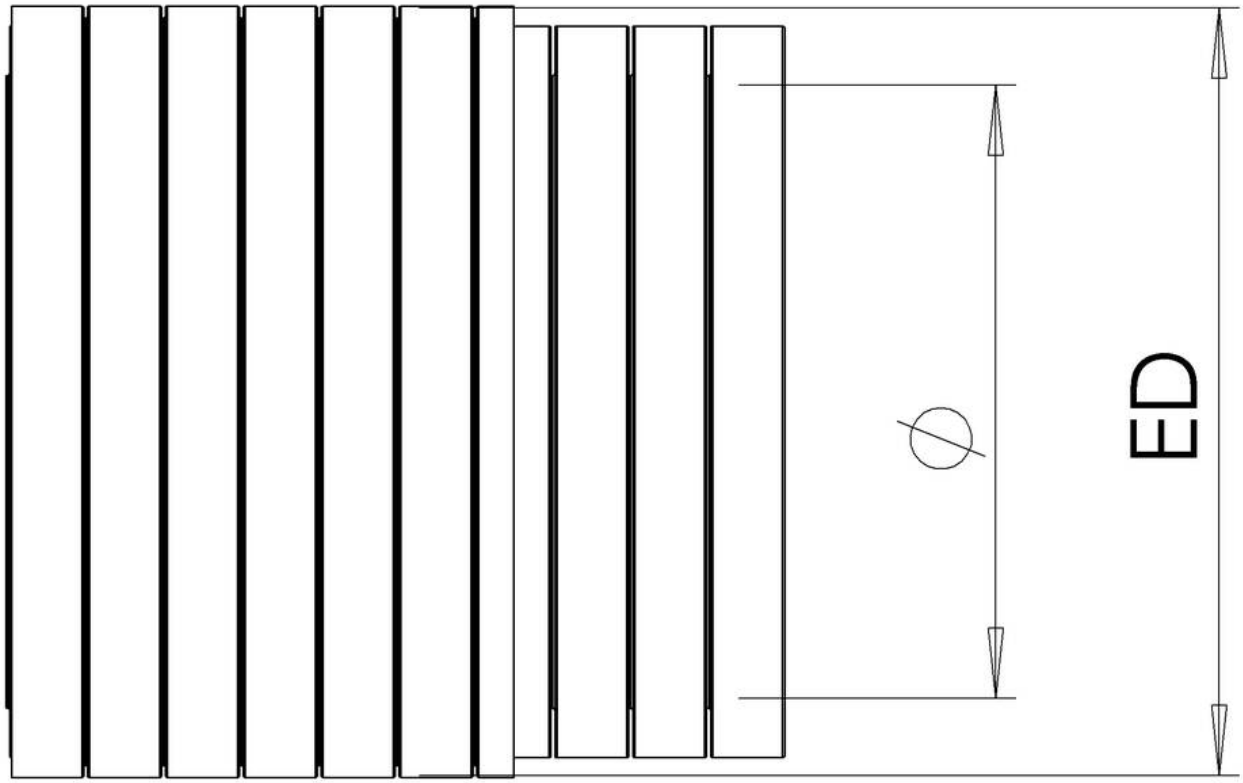

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice