
BCA-S-14-BK

Conduit PA6 UL94-V0, RAL 9005, NW14

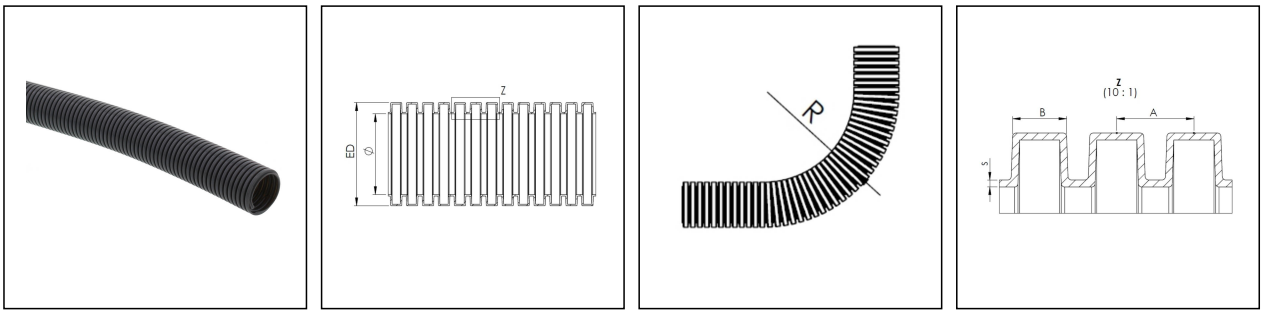

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

HL3 EN 45545 BRACE RoHS

Material	PA6 UL94-V0
Temp. range min	-40 °C
Temp. range max	140 °C
Operational areas	EN 45545 - Railway
Product Color	RAL 9005
NW	14
External diameter ED	18,5 mm
Ø inside	14,2 mm
Profile width A	3,3 mm
Width B	2,3 mm
Bending radius R	50 mm
Wall thickness S	0,3 mm
Model	Standard profile
UL 1696	No
Type	BCA-S-14-BK
Order no. RAL 9005	10107074
Packing unit	50 m
EAN number	4007686036794
Tariff number	39173900
ETIM-Classification	EC001177

Recommended accessories

EBFS-14-20-BK	10106866

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com


Other technical data on request / subject to change without notice

EMBFS-14-20-BK	10106898
BCC-14-BK	10106942

06.11.2026


Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

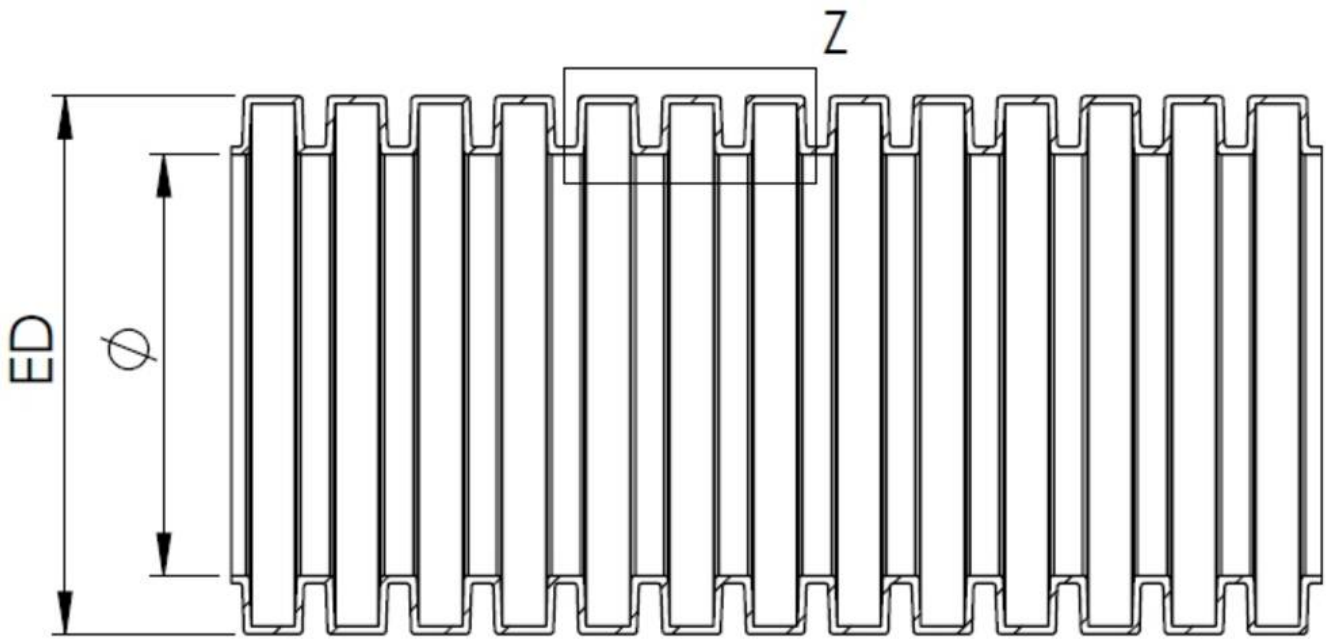

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice

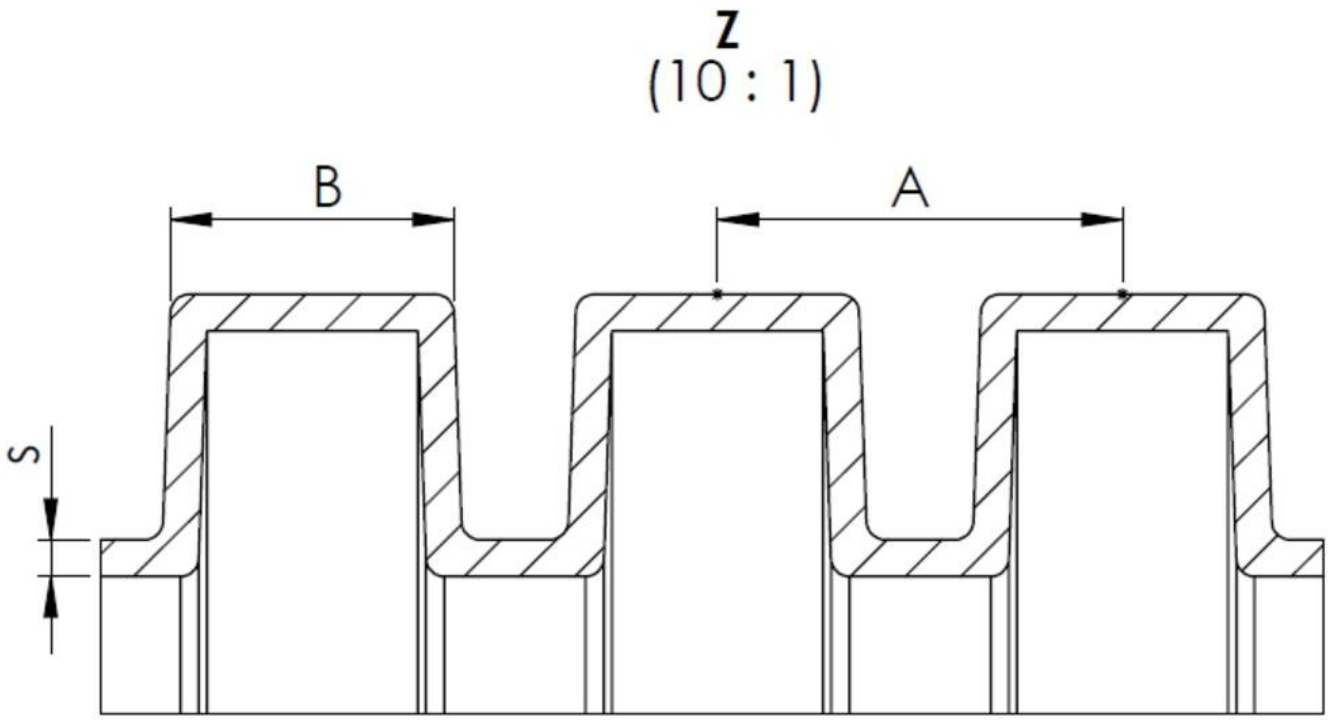

Your Contact:
WISKA Hoppmann GmbH
Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany
☎ +49-4191-508-0 · 🖷 +49-4191-508-209
contact@wiska.de · www.wiska.com

Other technical data on request / subject to change without notice